



TRI-BAND FEED L/S/C

C-Band Without Compromise
Upgradeable



TELEMETRY GROUND SOLUTIONS

Safran Data Systems offers the **best match for performance, flexibility and price** with its patented miniaturized tri-band feed. **Common L/S/C radiating front end** fitted with a modular set of active RF modules allow simultaneous reception and tracking in any frequency band, whereas a small and light-weight enclosure makes the **feed mountable on any dishes from 6 feet (1.8m) to 24 feet (7.3m), and larger.**

Proposed in **any single, dual or tri-band configuration**, the feed offers the best value for money and flexibility to customers willing to meet current requirements while keeping future in mind. Upgradeable to any missing band with simple RF modules addition ensures your **capacities are scalable and your costs under control.**



Launch Vehicle Telemetry



Missile Testing



Fixed & Rotary Wing

LTE/4G MITIGATION

LTE/4G, WCS & Customized Rejection Filters (upgradeable during antenna lifetime)

SCM 1000 HZ SCAN RATE

Highest Accuracy of Tracking

MODULAR L - S OR C BAND

Simple Add-On upgrade without any Structural Change

SEAMLESS PRIME FOCUS INTEGRATION

Tri-Band even with Dishes as Small as 6'/1.8m

NO RF-BAND COMPROMISE

Concentric 3-Band Feed, without need of Dichroic Filter

TELEMETRY GROUND SOLUTIONS TRI-BAND FEED L/S/C

8 radiating elements used for the tracking provide a perfect axial symmetry for the Delta channel (equivalent to TE21) leading to the **utmost tracking performance**.

On top of that, the feed embeds additional capabilities such as LNA bypass for very short range tracking as well as tracking LNA muting for long range reception.

SYSTEM SPECIFICATIONS

Frequency Bandwidth

Lower L-Band	1435 - 1545 MHz
Upper L- Band	1790 - 1850 MHz
S-Band	2200 - 2400 MHz
C-Band (Full)	4400 - 5250 MHz

Design

Polarizations	RHCP & LHCP
Scanning Frequency	Internal Frequency 50Hz / 500Hz
.....	External Frequency up to 1 kHz
Σ (for Each Band)	1 Printed Radiating Element
Δ (for Each Band)	8 Printed Radiating Elements
Independent Filters for Each Band (e.g. S-Band Filter rejects UMTS & LTE Frequencies)	

Signal Amplification (for each band)

Design	2 Cascaded LNAs per Channel
High Gain Mode	35 dB (All LNAs On)
Low Gain Mode (Very Short Range).....	15 dB (1 LNA Bypassed)
Long Range Tracking	Tracking LNAs Off

Reflector Pairing

Prime Focus or ring focus Mounting	
F/D Optimized for	0.4

HPBW	1525 MHz	2300 MHz	5150 MHz
6 ft (1.8 m)	7.7°	5.0°	2.2°
8 ft (2.4 m)	5.7°	3.8°	1.7°
10 ft (3.0 m)	4.6°	3.0°	1.3°
Acquisition Aid	33°	26°	22°

Tracking Beamwidth 1,5 x HPBW

Miscellaneous

Length	18.9" (480 mm)
Diameter	11.8" (300 mm)
Weight	< 40 lb (18 kg)
Operational	-45°C to +55°C (-49°F to 131°F)
Storage	-45°C to +70°C (-49°F to 158°F)

MAIN FIGURES OF MERITS (25° EI, 20°C Clear Sky)


Performance for $\Sigma + \Delta$ Channels without Filters ⁽¹⁾

	L-Band @ 1525 MHz	S-Band @ 2300 MHz	C-Band @ 5150 MHz
6 ft (1.8 m)	3.0 dB /K	6.5 dB /K	11.5 dB /K
8 ft (2.4 m)	6.0 dB /K	9.0 dB /K	14.5 dB /K
10 ft (3.0 m)	8.0 dB /K	11.0 dB /K	16.5 dB /K
18 ft (5.5 m)	13.0 dB /K	16.0 dB /K	22.0 dB /K
24 ft (7.3 m)	15.5 dB /K	19.0 dB /K	24.5 dB /K

⁽¹⁾ Up to +0.7 dB in all performances when tracking LNAs are muted for very long range
On request, improved G/T versions can be provided

ASSOCIATED PRODUCTS

- ▶ Safran Data Systems' Antennas 6 - 43 ft (1.8 - 13.5 m)
- ▶ Cortex RTR-X4 and RTR-X1 with Multi-Band Inputs
- ▶ S/L/C Acquisition Aid Antenna with the same architecture and a dielectric lens for higher directivity

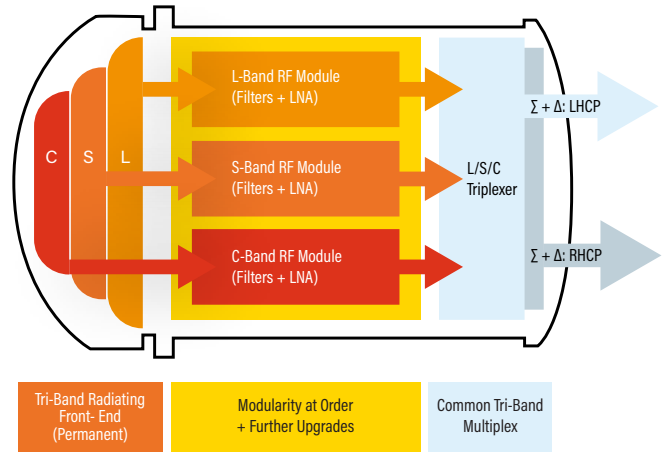

GLOBAL SALES

5, Avenue des Andes - CS 90101 - 91978 Courtaboeuf Cedex - FRANCE - Tel.: +33 1 69 82 78 00 - Email: sales.sdsy@safrangroup.com

USA

3005 Business Park Dr - Norcross, GA 30071 - USA - Tel.: +1 770 753 4017 - Email: sales@SafranDataSystemsUS.com